


HAZCO

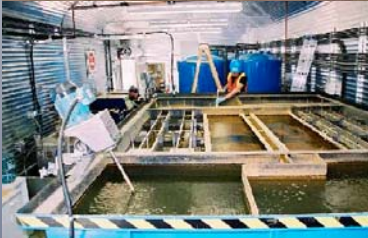

Site Remediation
Waste Management
Licensed Transportation
Industrial Landfills
Soil Treatment
Water Treatment
Remediation Systems
Emergency Response
Facility Demolition
Equipment Rentals

www.hazco.com

PROJECT HIGHLIGHTS

- Approximately 20,000 litres of diesel fuel was released from a storage tank. The fuel flowed to the foundation of the Pikangikum First Nation School.
- HAZCO responded to the incident, establishing exclusion zones, securing the area against explosion hazards, and developing a full health and safety response plan.
- The HAZCO response team consisted of four personnel. The HAZCO team trained a local work force in proper PPE for the situation at hand, and proceeded to deploy the local work force, under HAZCO supervision, to remove the liquid phase diesel fuel and diesel impacted soils.
- HAZCO removed approximately 16,000 litres of diesel fuel. HAZCO established a water treatment plant to treat approximately 10,000 litres of diesel impacted water. Approximately 100m³ of impacted soil were removed from beneath the school foundation using a conveyor system.
- The soils were removed to an established treatment pad located at the First Nation Landfill, where HAZCO placed the soil for treatment.
- Total duration of the cleanup was approximately three weeks.
- Of equal importance to the expertise of our personnel was the ability of the HAZCO team to work closely with the local community and council, as well as officials from Health Canada, the Province of Ontario and the Department of Indian and Northern Affairs.

